

Homogenizer HL1

- Max. 285 l/h
- Homogenizing pressure up to 700 bar
- Absorbed motor power: max. 3 kW
- Aseptic execution optional
- Poppet valve for low viscous and slightly abrasive products
- Ball valves for high viscous and abrasive products
- Made in Germany

Poppet valves

For low viscous and slightly abrasive products


Model	Max. Pressure	Max. Capacity
HL1.3	(bar)	(Liter pro hour)
-200T	200	285
-275T	275	230
-400T	400	175

Ball valves

For high viscous and abrasive products

Model	Max. Pressure	Max. Capacity
HL1.3	(bar)	(Liter pro hour)
-200K	200	210
-275K	275	160
-400K	400	125

Model	Max. Pressure	Max. Capacity
HL1.2	(bar)	(Liter pro hour)
-700K	700	60
-800K	800	55

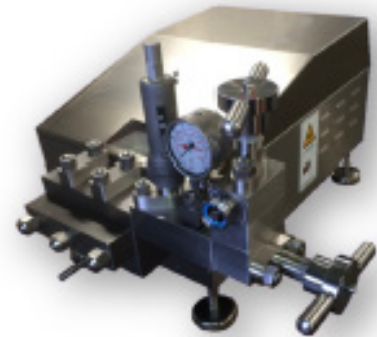

Weight with Motor: max. 300 kg
Technical changes reserved!

