

Homogenizer HL2

- Max. 35 (gal/min)
- Max. Homogenizing pressure up to 10,153 PSI
- Poppet valve and ball valve execution
- Max. motor power: 50 hp
- Weight with motor approx. 3,748 lbs
- Customized execution
- Optional in aseptic execution
- Designed and made in Germany


Technical changes reserved!



Poppet valves

For low viscosity and slightly abrasive products

Model	Max. Pressure (PSI)	Max. Capacity (GPM)
HL2-70T	1,025	35
HL2-140T	2,031	25
HL2-200T	2,900	15
HL2-250T	3,626	14
HL2-300T	4,351	11
HL2-350T	5,076	9
HL2-550T	7,977	6

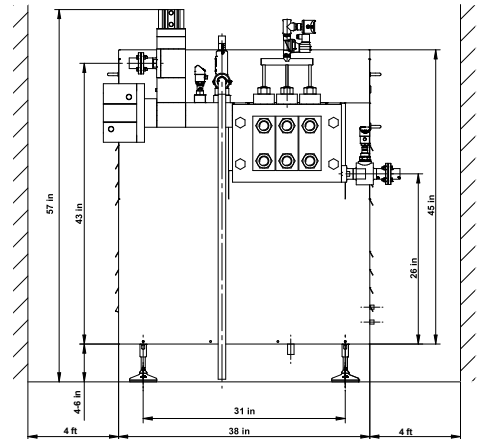

Ball valves

For high viscosity and abrasive products

Model	Max. Pressure (PSI)	Max. Capacity (GPM)
HL2-150K	2,176	18
HL2-200K	2,900	11
HL2-250K	3,626	10
HL2-300K	4,351	8
HL2-350K	5,076	6
HL2-550K	7,977	4
HL2-700K	10,153	2

