
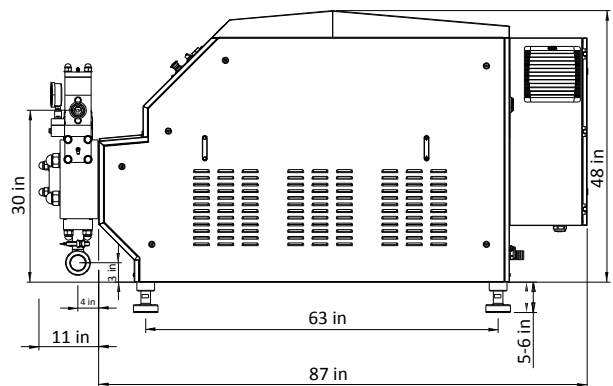


# Homogenizer HST - HLE55

- Standard capacity 33 gal/min
- Standard homogenizer pressure 2,901 PSI
- Absorbed motor power: 74 hp
- Aseptic execution is optional
- Sustainable for processing high viscosity products
- Unique design in accordance with the conditions is use simple installation, economic design, and easy maintenance

Weight with motor: Approx. 6,173 lbs  
 Technical changes reserved!

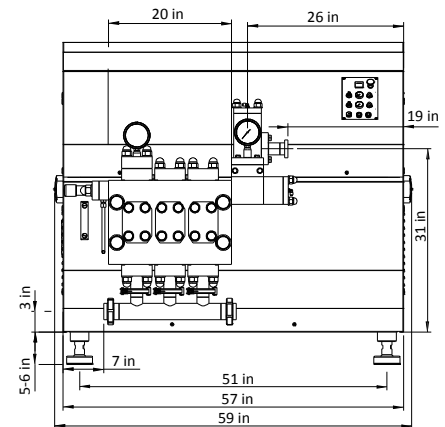

Model	Max. Capacity	Max. Pressure
HST-HLE55	GPM	PSI
HLE55-150	44	2,175
HLE55-200	33	2,901
HLE55-250	24	3,626
HLE55-300	20	4,351
HLE55-350	18	5,076
HLE55-400	13	5,802
HLE55-500	11	7,252
HLE55-600	9	8,702
HLE55-750	7	10,878
HLE55-850	4	12,328
HLE55-1000	3	14,504

Model	Max. Speed	Max. Diameter
HST-HLE55	RPM (Speed)	MM (Diameter)
HLE55-150	135	90
HLE55-200	135	80
HLE55-250	128	70
HLE55-300	135	60
HLE55-350	122	60
HLE55-400	105	40
HLE55-500	108	45
HLE55-600	114	40
HLE55-750	114	35
HLE55-850	101	30
HLE55-1000	107	25