ZP3 Series Positive Displacement Pumps

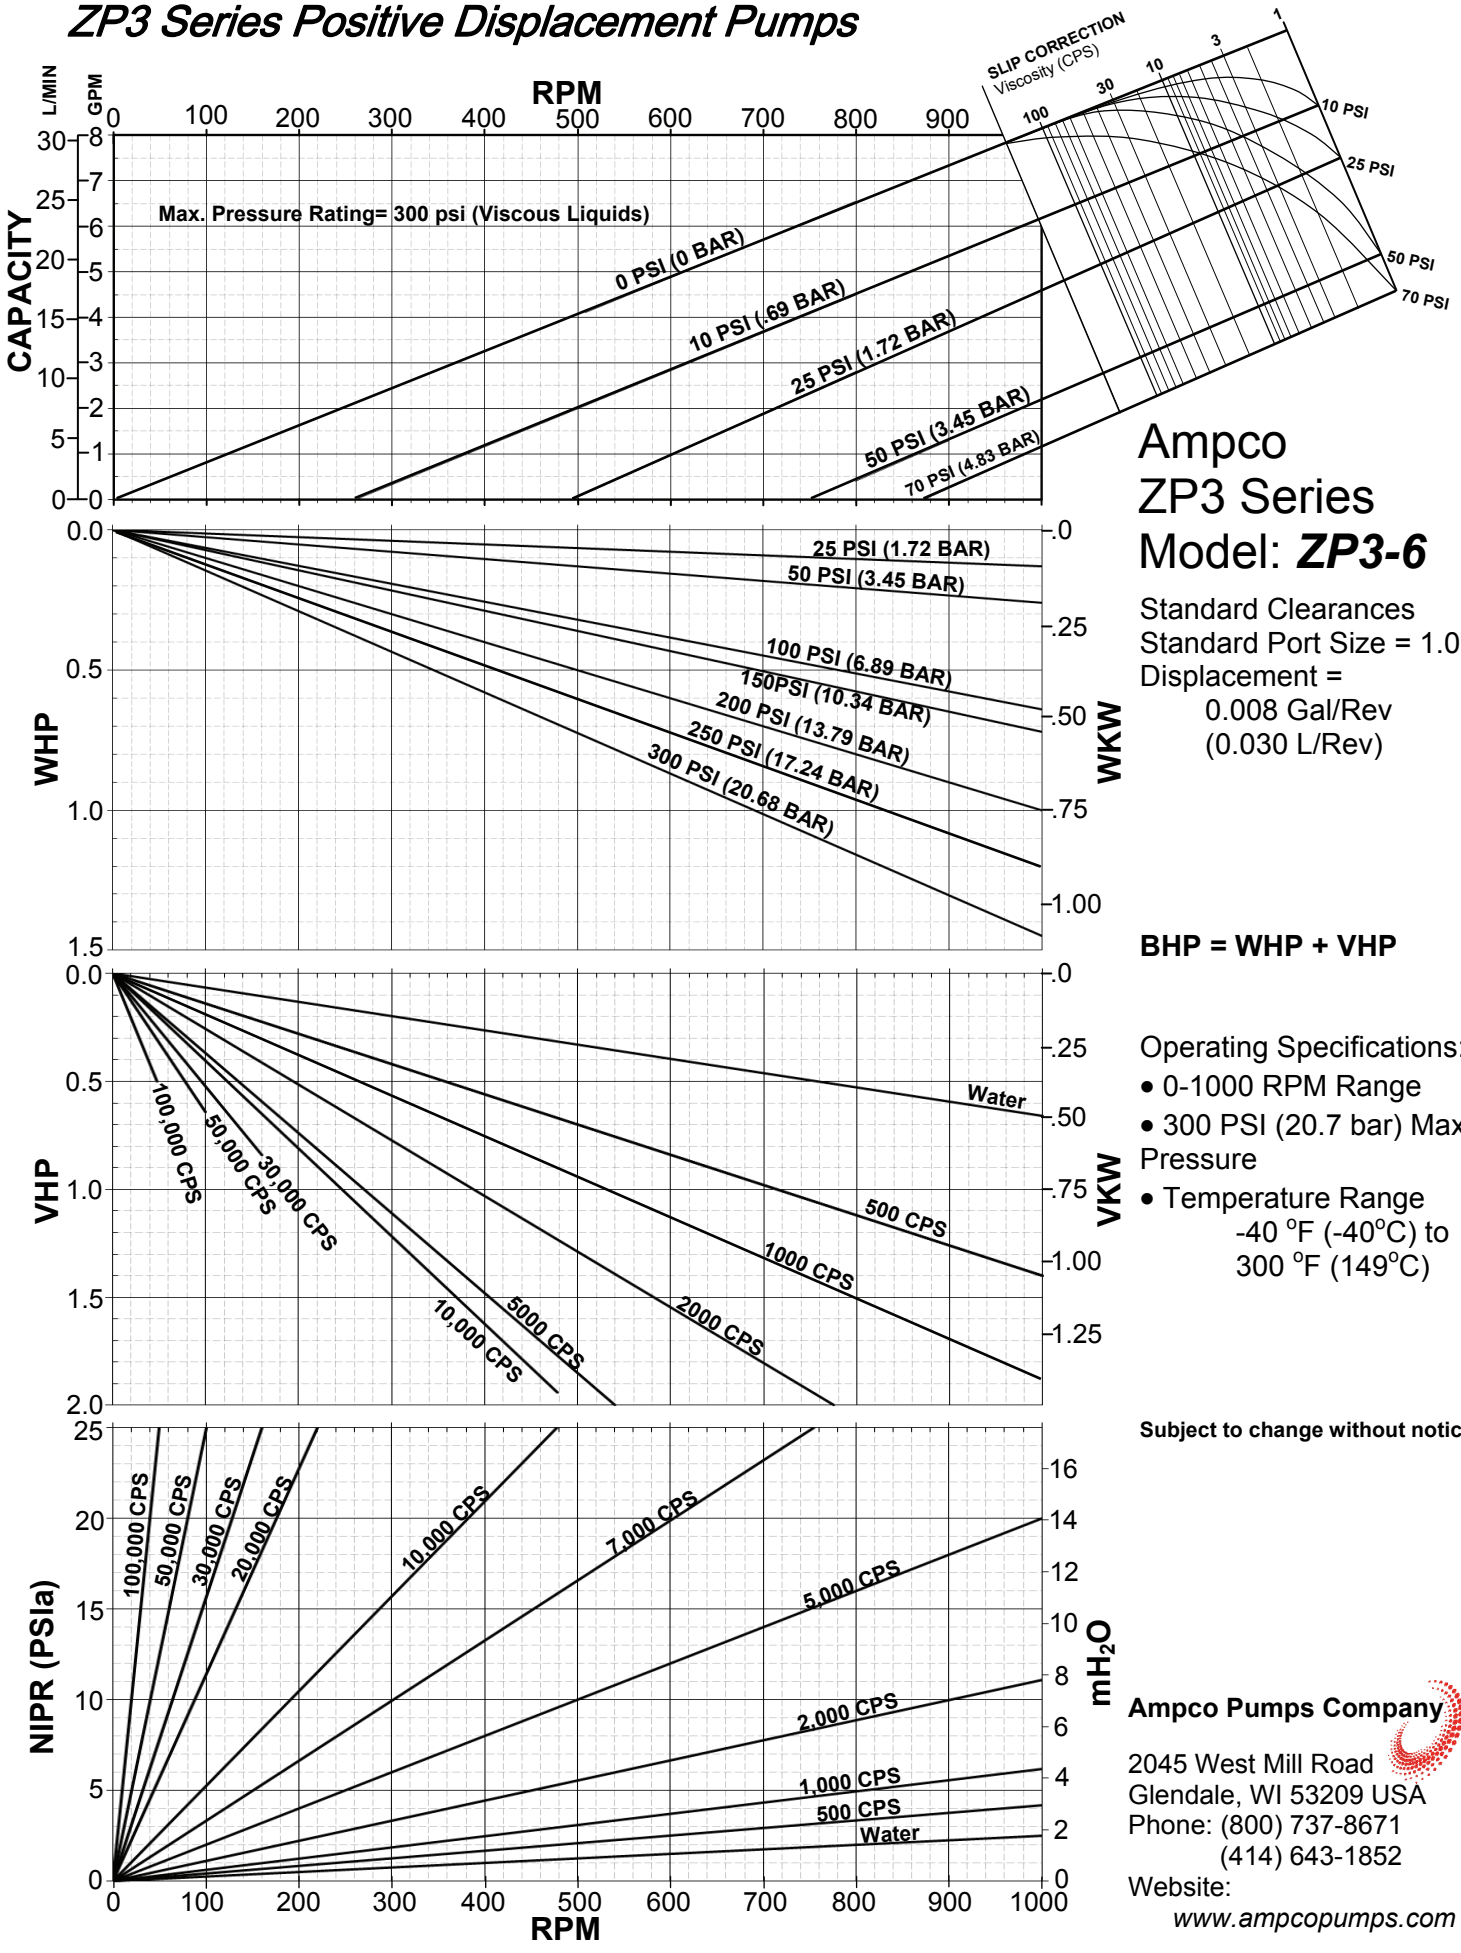

Ampco ZP3 Series Model: ***ZP3-6***

Standard Clearances
Standard Port Size = 1.0”
Displacement =
0.008 Gal/Rev
(0.030 L/Rev)

BHP = WHP + VHP

Operating Specifications:

- 0-1000 RPM Range
- 300 PSI (20.7 bar) Max. Pressure
- Temperature Range
  -40 °F (-40°C) to
  300 °F (149°C)

Subject to change without notice

Ampco Pumps Company

2045 West Mill Road
Glendale, WI 53209 USA
Phone: (800) 737-8671
(414) 643-1852
Website:
www.ampcopumps.com

ZP3 Series Positive Displacement Pumps

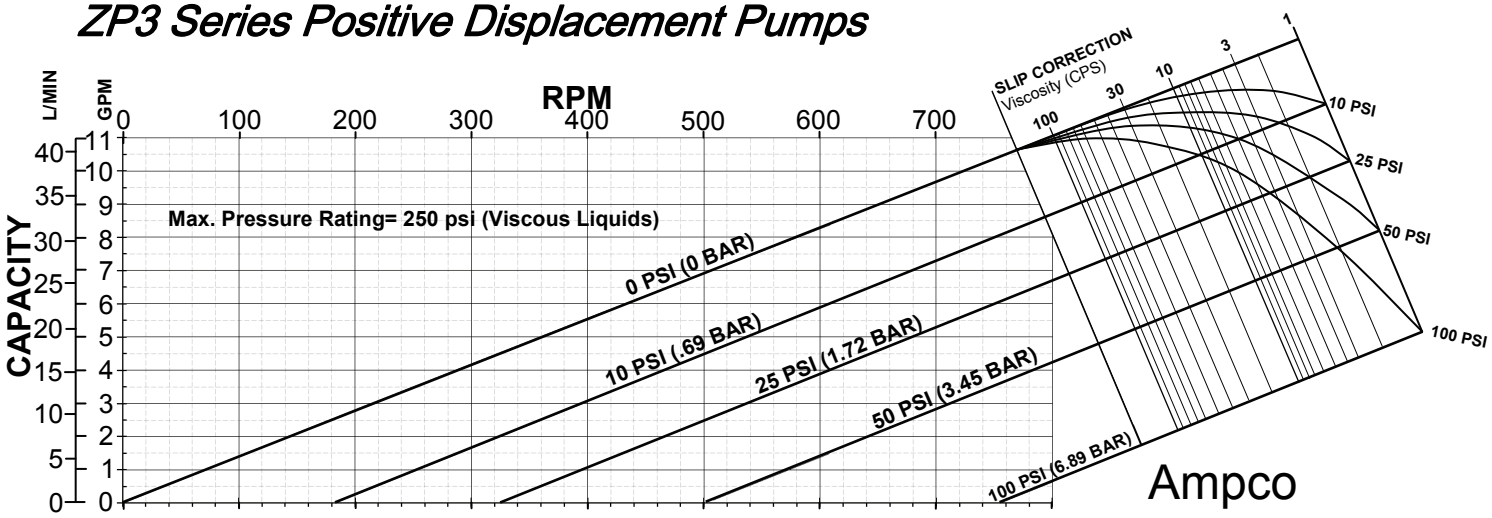

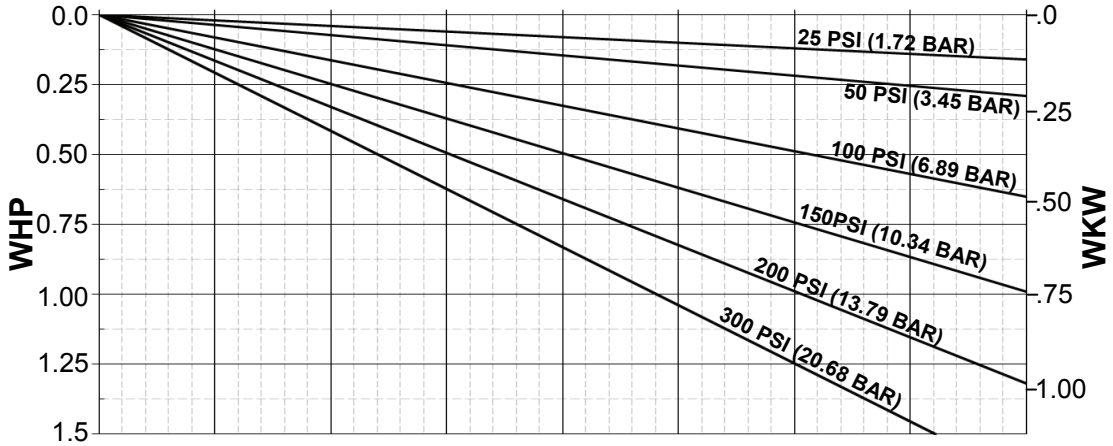

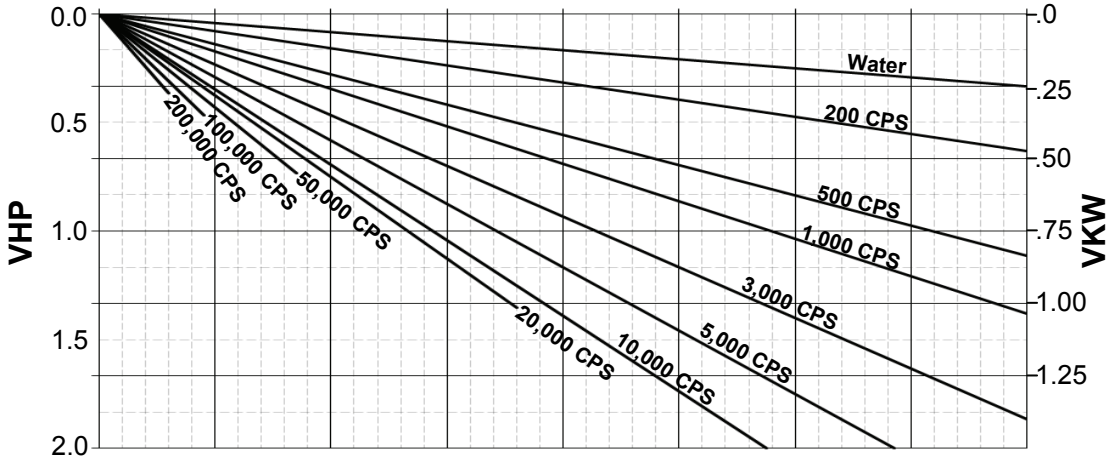

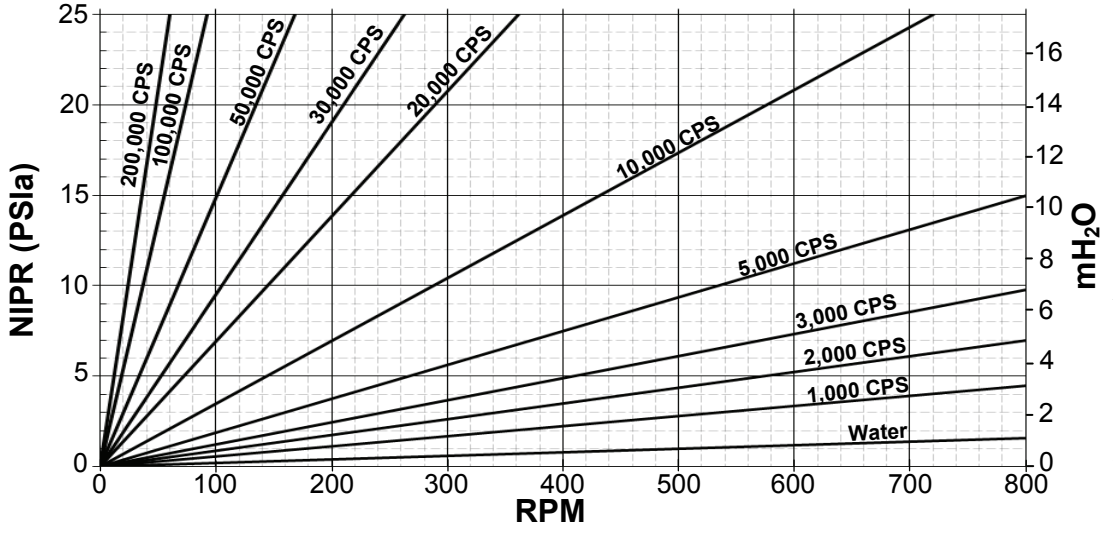

Ampco ZP3 Series Model: ***ZP3-15***

Standard Clearances
Standard Port Size = 1.5”
Displacement =
0.014 Gal/Rev
(0.054 L/Rev)

BHP = WHP + VHP

Operating Specifications:

- 0-800 RPM Range
- 250 PSI (17.2 bar) Max. Pressure
- Temperature Range
  -40 °F (-40°C) to
  300 °F (149°C)

Subject to change without notice

Ampco Pumps Company

2045 West Mill Road
Glendale, WI 53209 USA
Phone: (800) 737-8671
(414) 643-1852
Website:
www.ampcopumps.com

ZP3 Series Positive Displacement Pumps

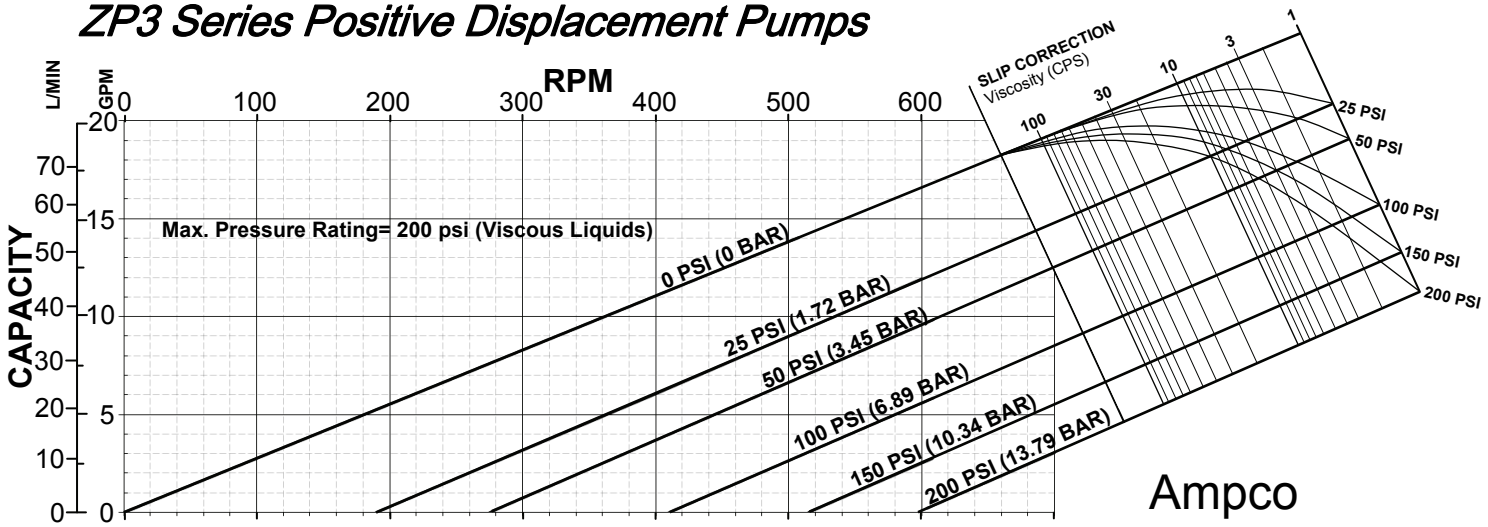

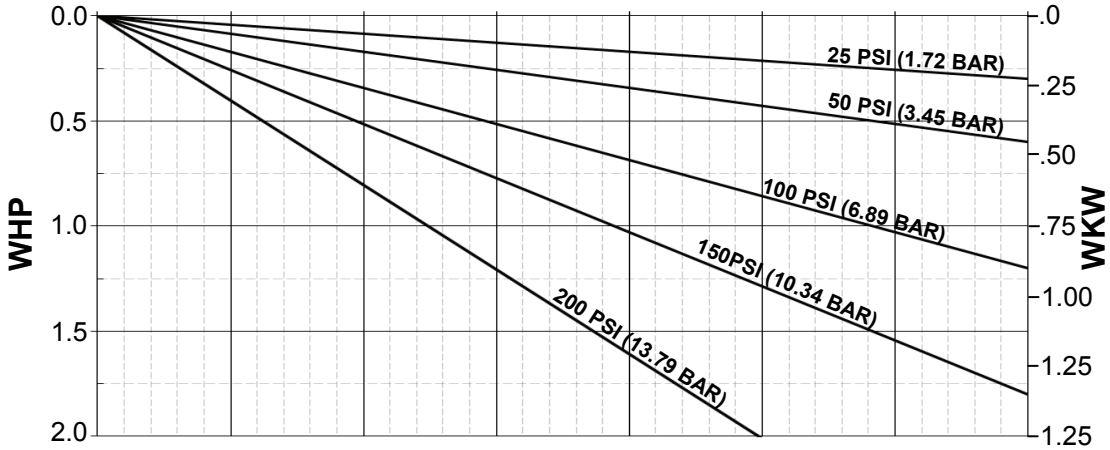

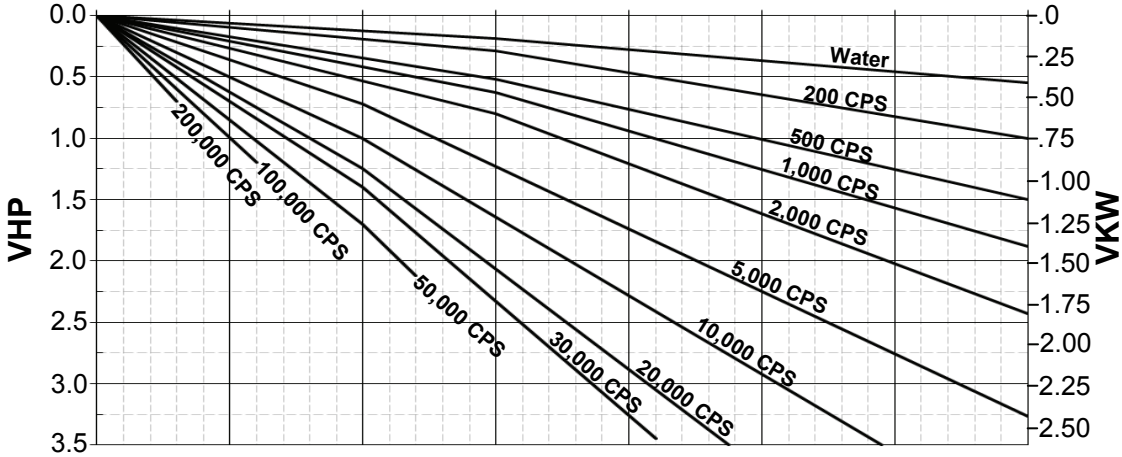

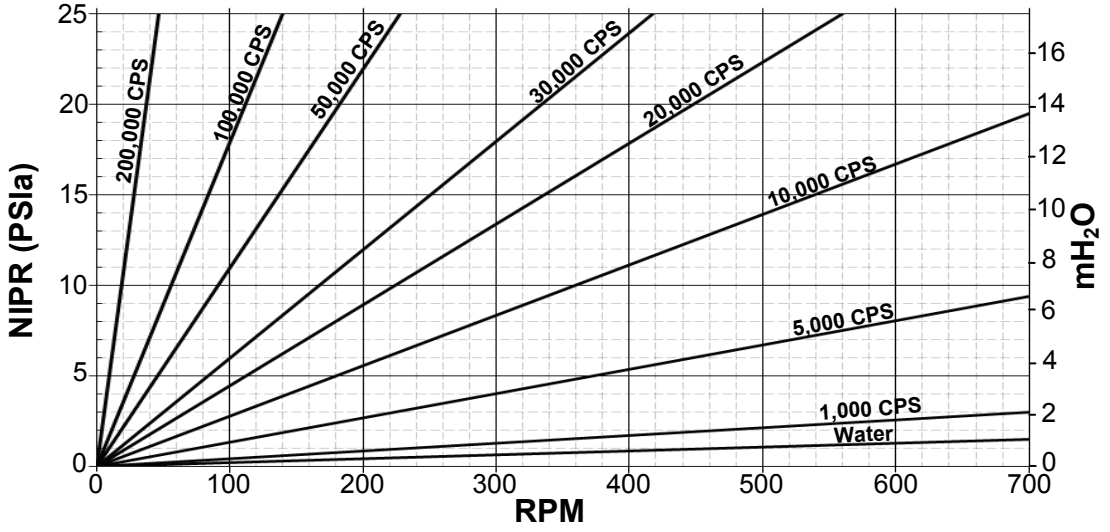

Ampco ZP3 Series Model: ***ZP3-18***

Standard Clearances
Standard Port Size = 1.5”
Displacement =
0.029 Gal/Rev
(0.108 L/Rev)

BHP = WHP + VHP

Operating Specifications:

- 0-700 RPM Range
- 200 PSI (13.8 bar) Max. Pressure
- Temperature Range
  -40 °F (-40°C) to
  300 °F (149°C)

Subject to change without notice

Ampco Pumps Company

2045 West Mill Road
Glendale, WI 53209 USA
Phone: (800) 737-8671
(414) 643-1852
Website:
www.ampcopumps.com

ZP3 Series Positive Displacement Pumps

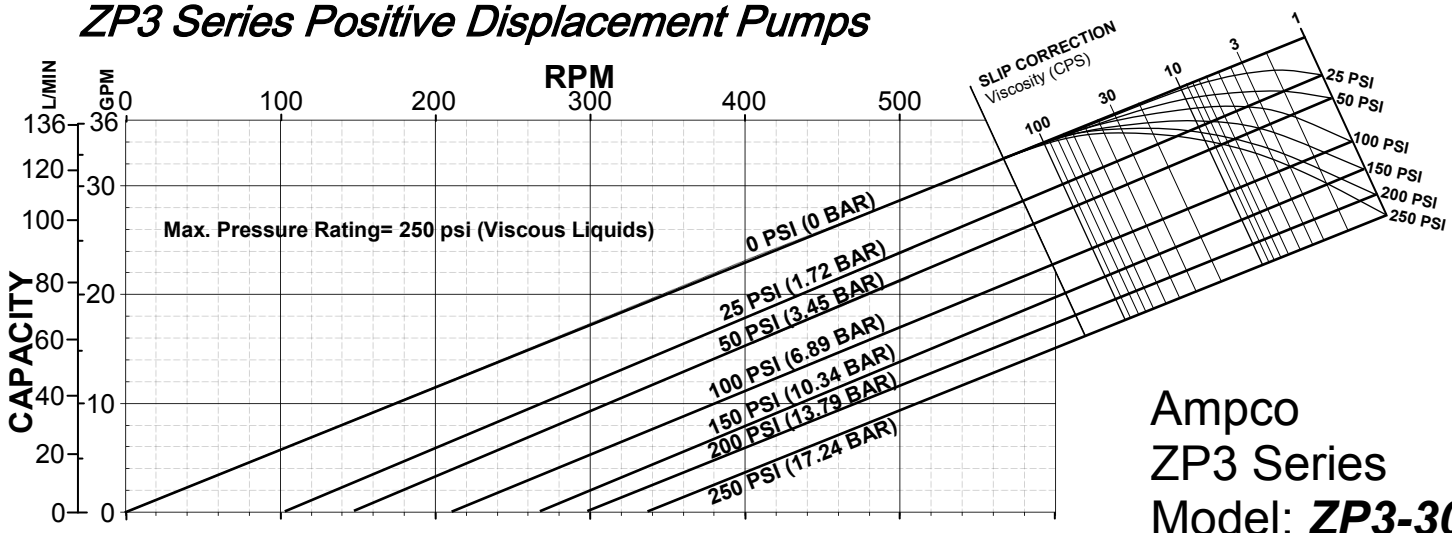

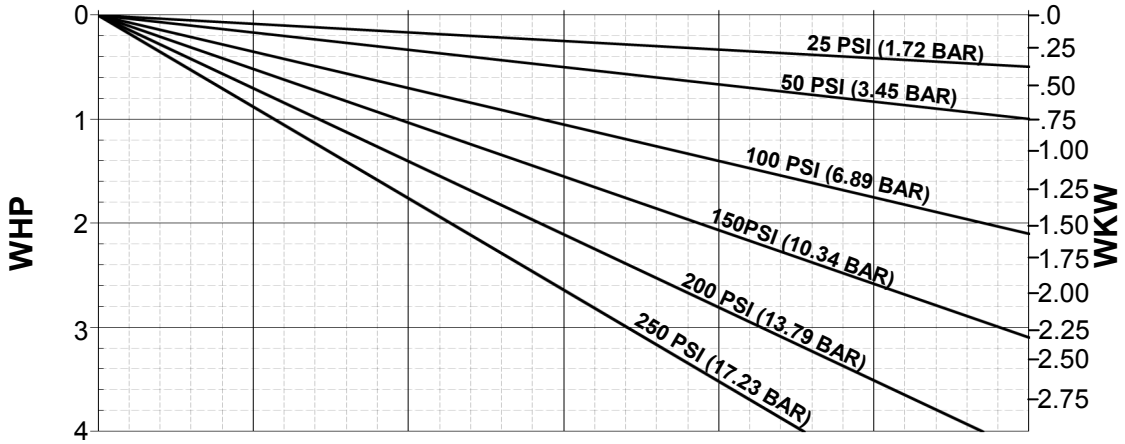

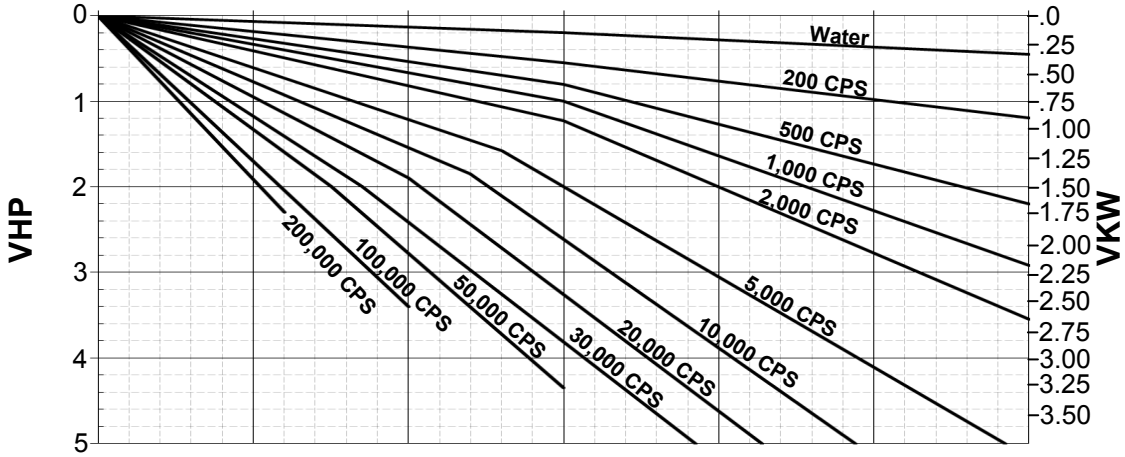

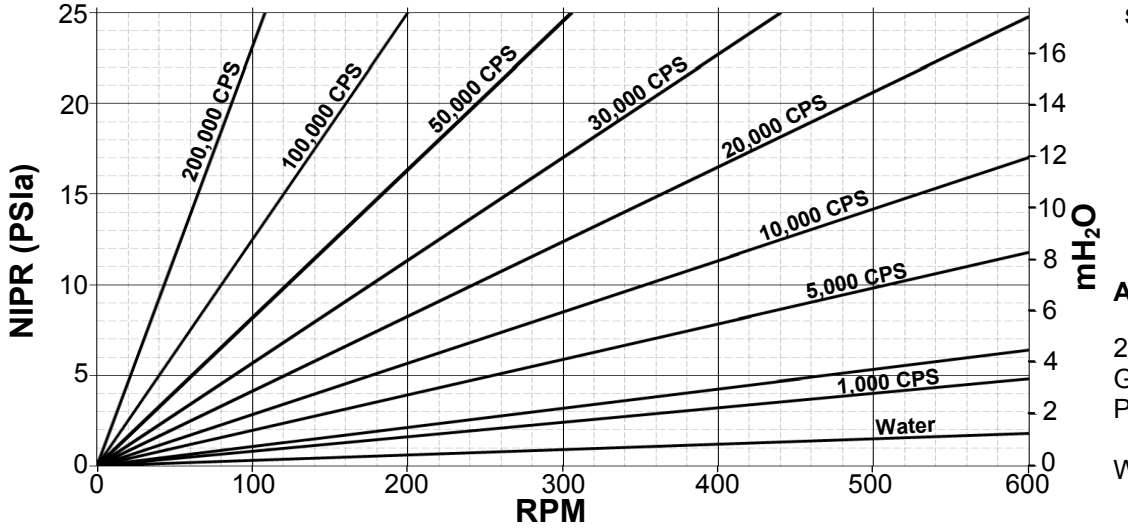

Ampco ZP3 Series Model: ***ZP3-30*** ***ZP3-34***

Standard Clearances
Standard Port Size = 1.5”
Displacement =
0.060 Gal/Rev
(0.227 L/Rev)

BHP = WHP + VHP

Operating Specifications:

- 0-600 RPM Range
- 250 PSI (17.2 bar) Max. Pressure
- Temperature Range
  -40 °F (-40°C) to
  300 °F (149°C)

Subject to change without notice

Ampco Pumps Company

2045 West Mill Road
Glendale, WI 53209 USA
Phone: (800) 737-8671
(414) 643-1852
Website:
www.ampcopumps.com

ZP3 Series Positive Displacement Pumps

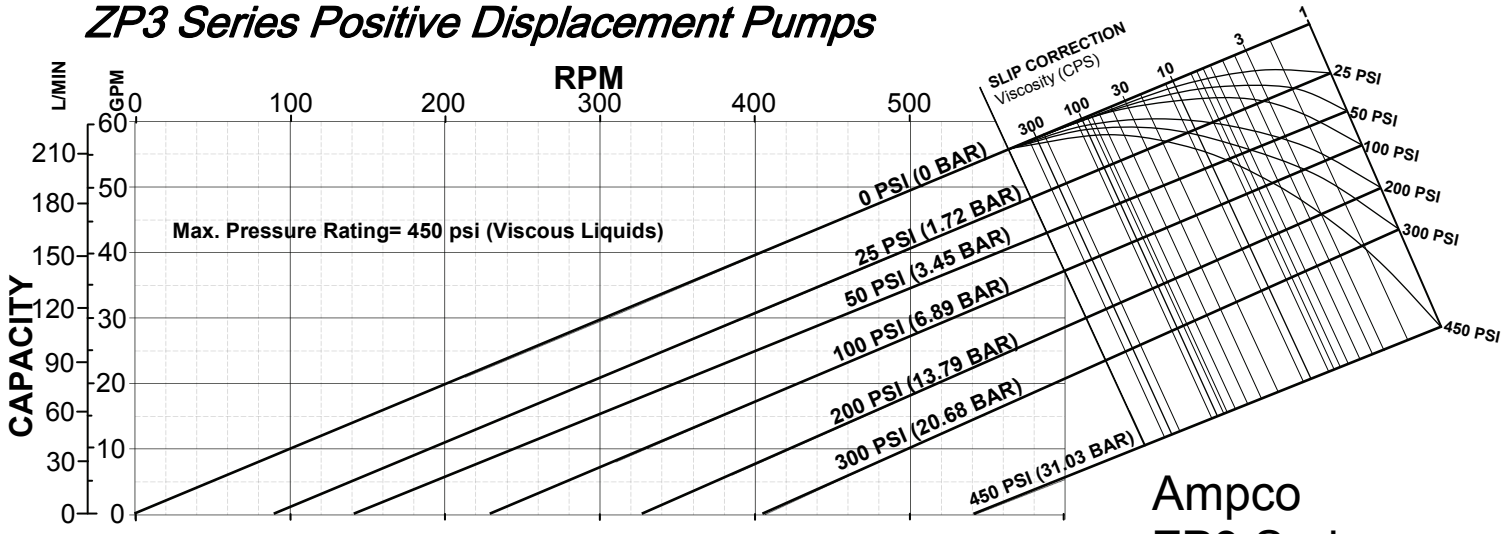

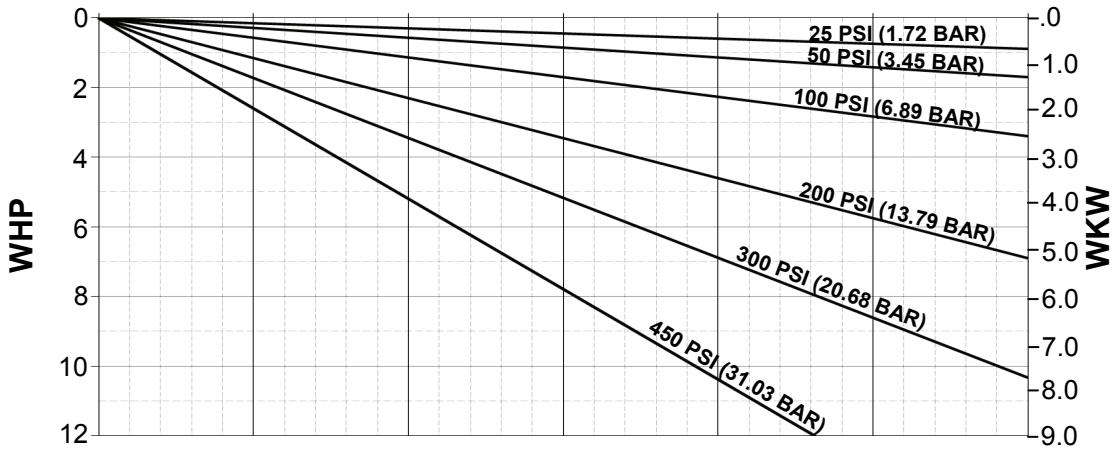

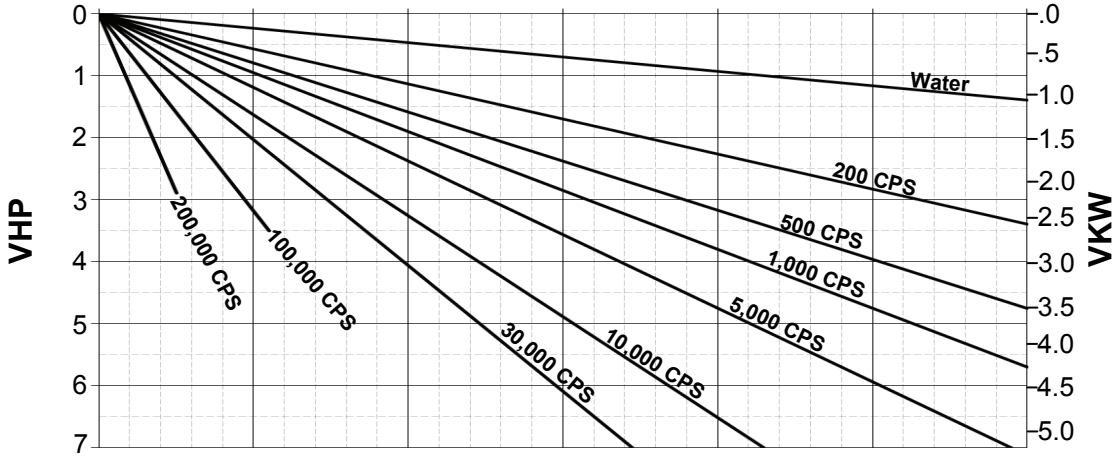

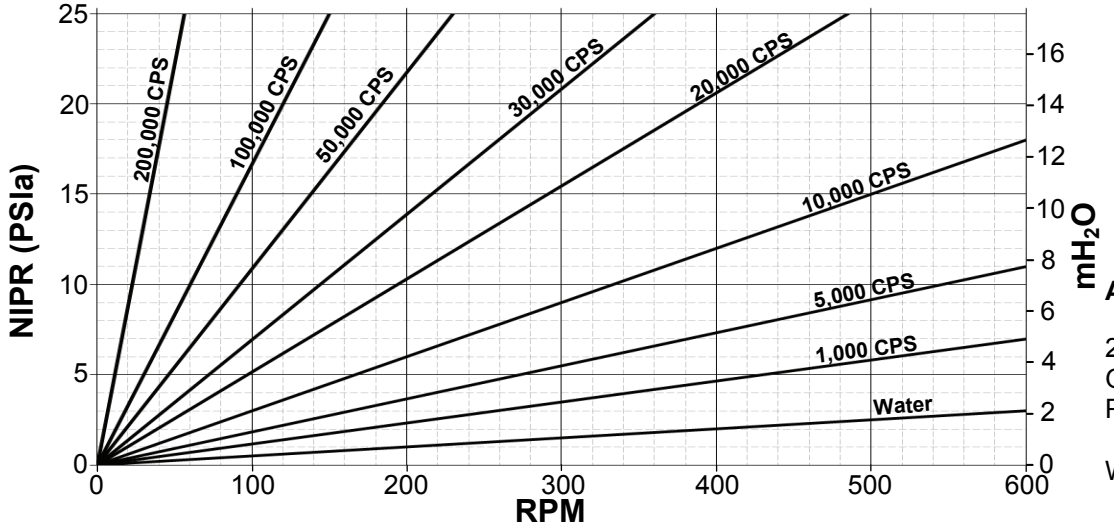

Ampco ZP3 Series Model: ***ZP3-45***

Standard Clearances
Standard Port Size = 2.0”
Displacement =
0.098 Gal/Rev
(0.371 L/Rev)

BHP = WHP + VHP

Operating Specifications:

- 0-600 RPM Range
- 450 PSI (31.0 bar) Max. Pressure
- Temperature Range
  -40 °F (-40°C) to
  300 °F (149°C)

Subject to change without notice

Ampco Pumps Company

2045 West Mill Road
Glendale, WI 53209 USA
Phone: (800) 737-8671
(414) 643-1852
Website:
www.ampcopumps.com

ZP3 Series Positive Displacement Pumps

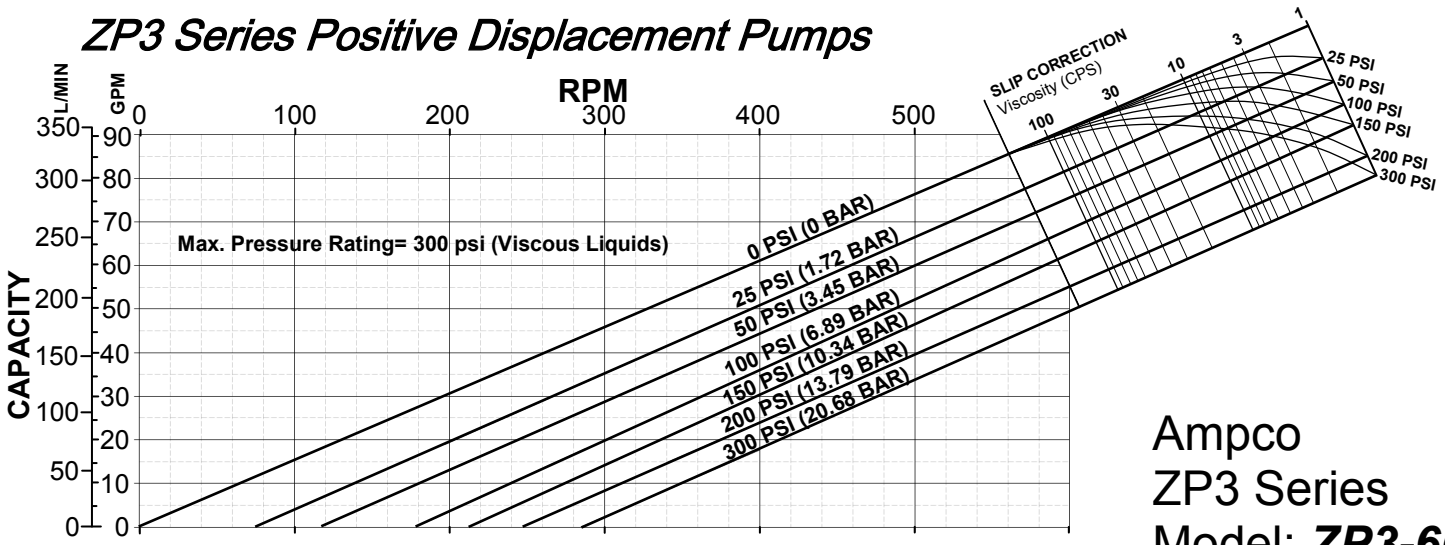

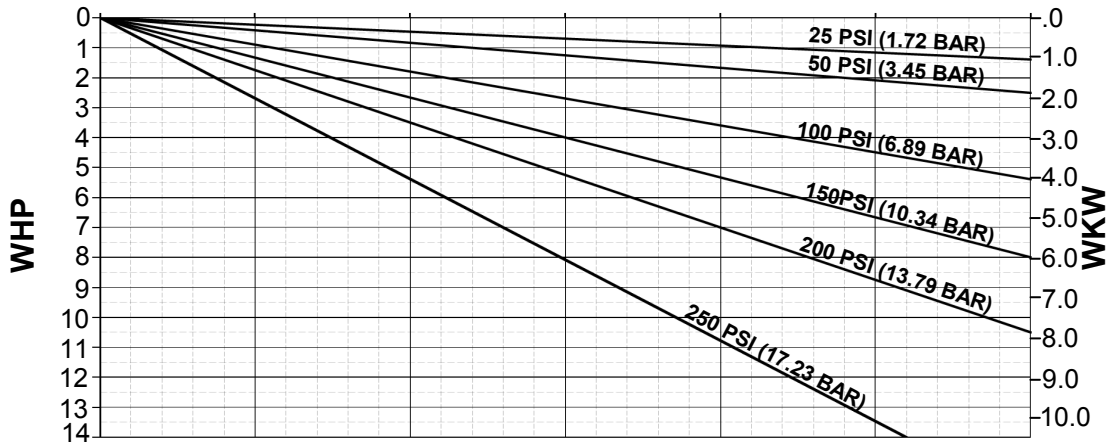

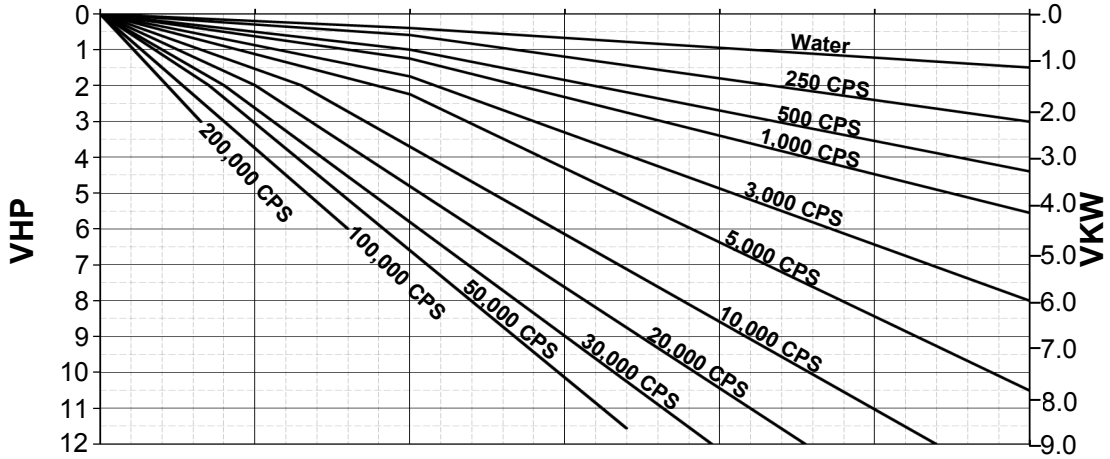

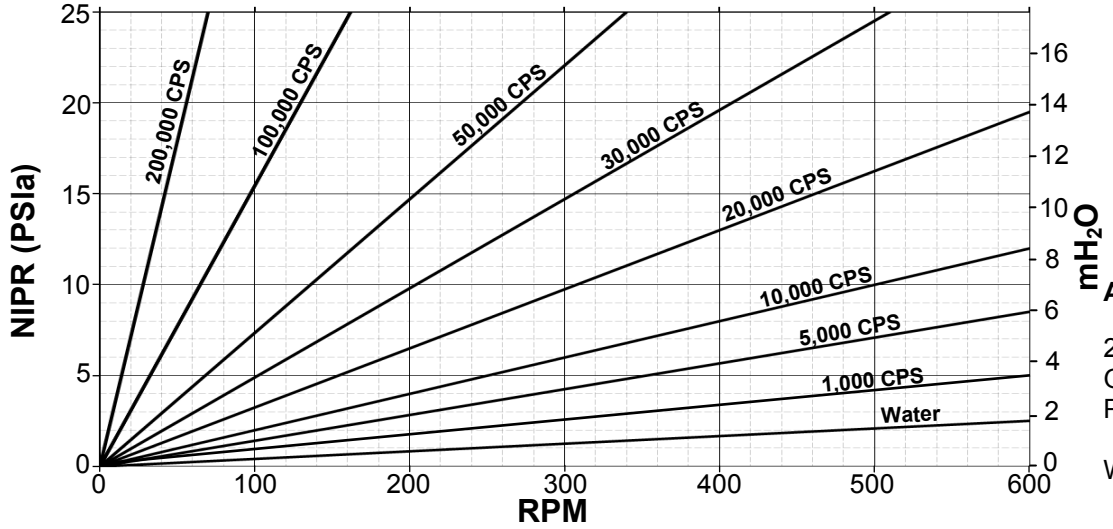

Ampco ZP3 Series Model: ***ZP3-60*** ***ZP3-64***

Standard Clearances
Standard Port Size = 2.5”
Displacement =
0.153 Gal/Rev
(0.579 L/Rev)

BHP = WHP + VHP

Operating Specifications:
- 0-600 RPM Range
- 300 PSI (20.7 bar) Max. Pressure
- Temperature Range
  -40 °F (-40°C) to
  300 °F (149°C)

Subject to change without notice

Ampco Pumps Company

2045 West Mill Road
Glendale, WI 53209 USA
Phone: (800) 737-8671
(414) 643-1852
Website:
www.ampcopumps.com

ZP3 Series Positive Displacement Pumps

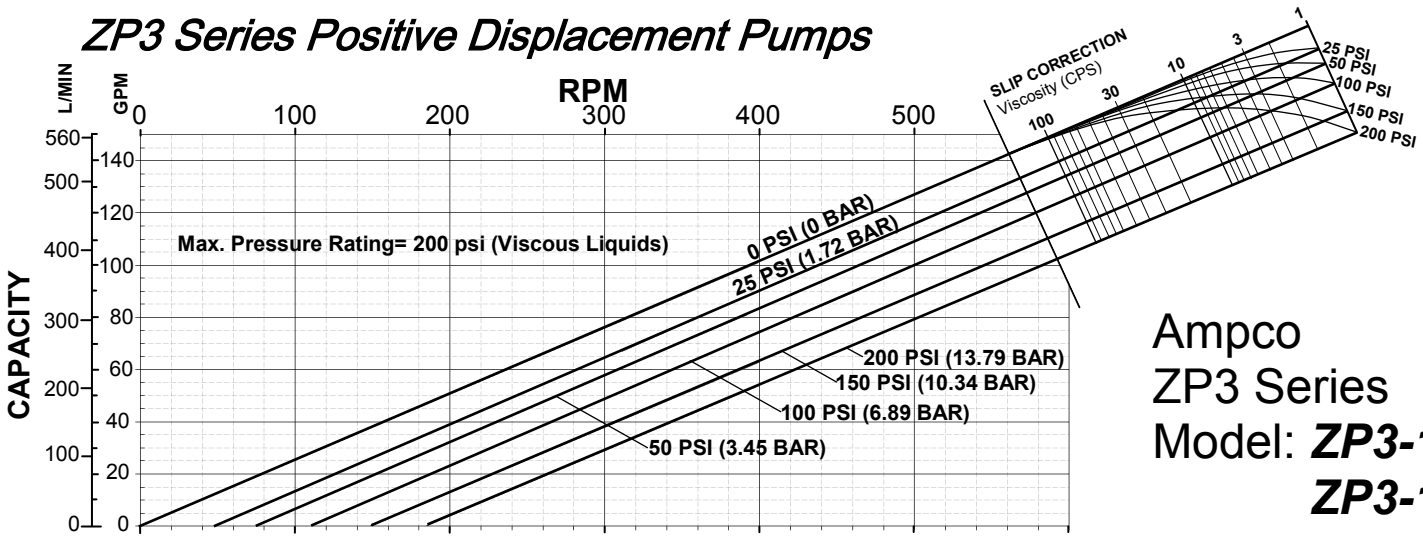

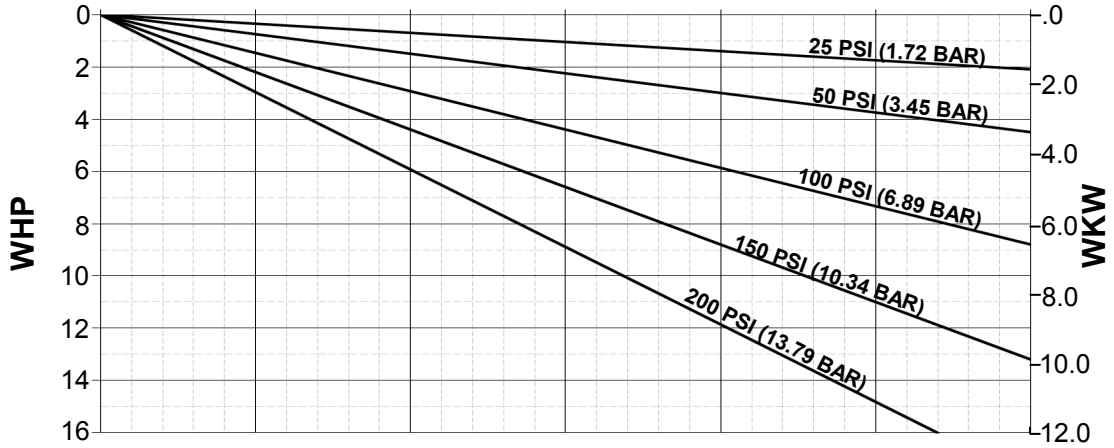

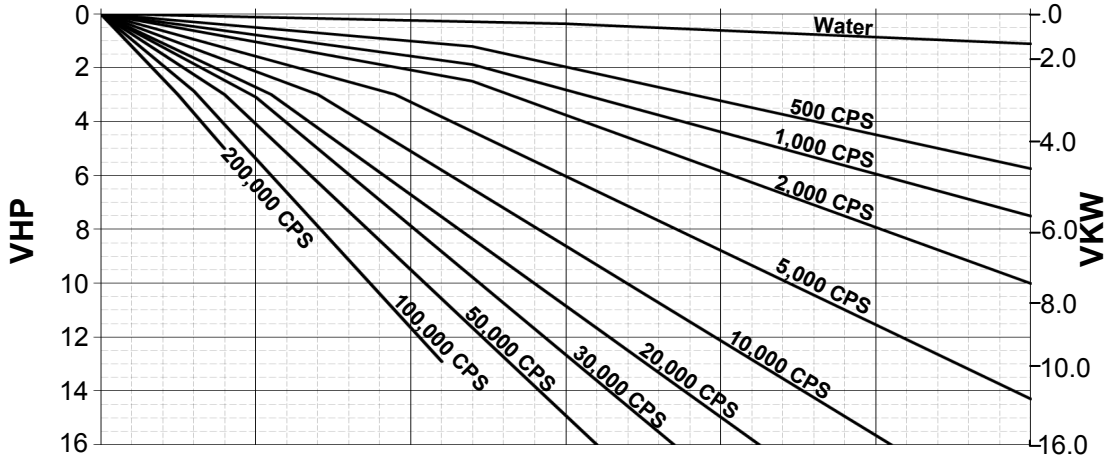

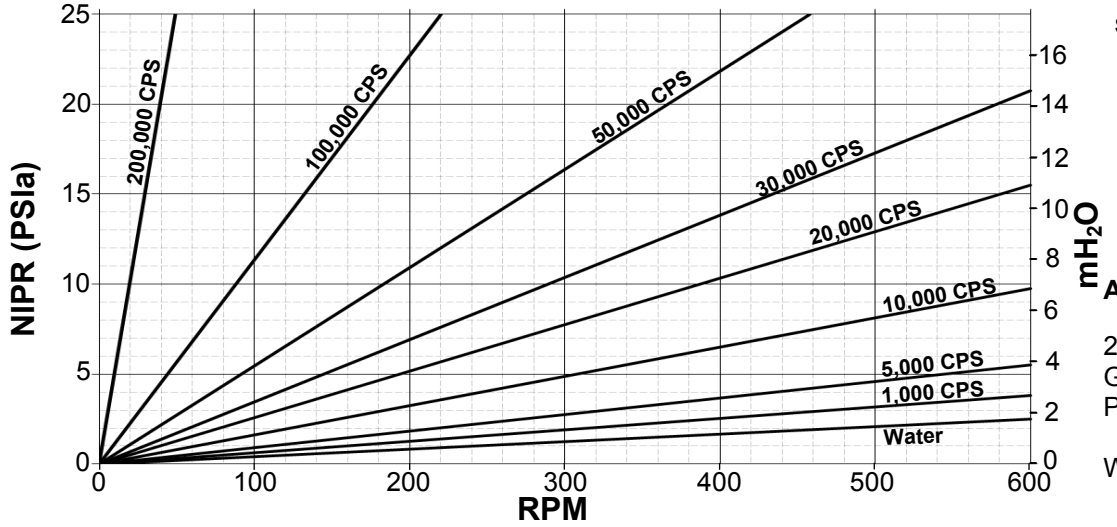

Ampco
ZP3 Series
Model: ***ZP3-130***
ZP3-134

Standard Clearances
Standard Port Size = 3.0”
Displacement =
0.253 Gal/Rev
(0.958 L/Rev)

BHP = WHP + VHP

Operating Specifications:

- 0-600 RPM Range
- 200 PSI (13.8 bar) Max. Pressure
- Temperature Range
  -40 °F (-40°C) to
  300 °F (149°C)

Subject to change without notice

Ampco Pumps Company
2045 West Mill Road
Glendale, WI 53209 USA
Phone: (800) 737-8671
(414) 643-1852
Website:
www.ampcopumps.com

ZP3 Series Positive Displacement Pumps

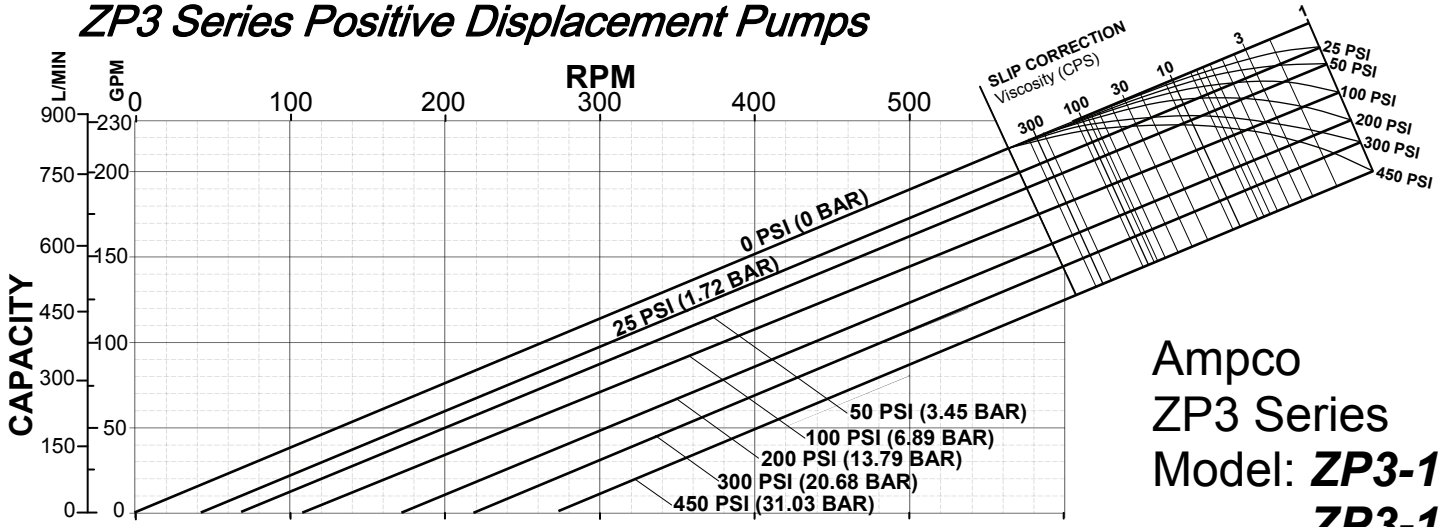

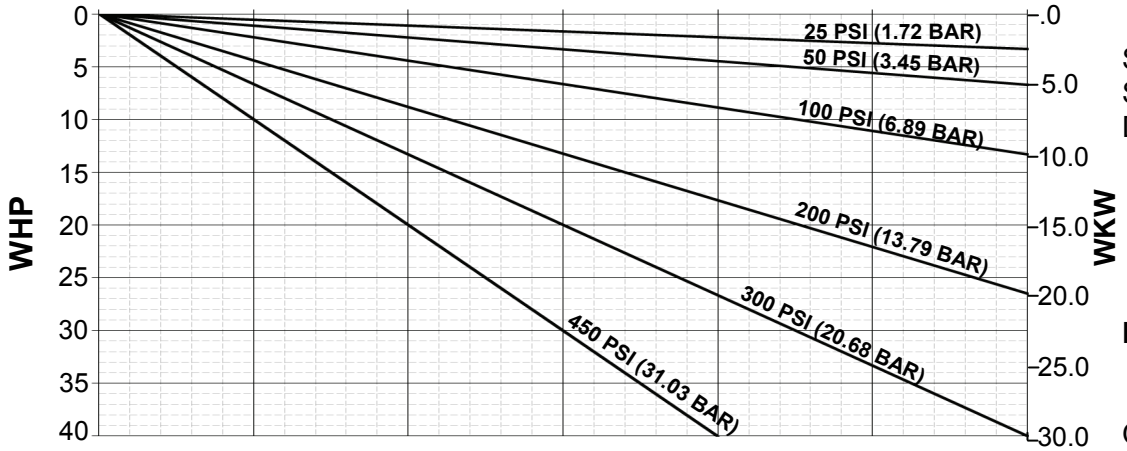

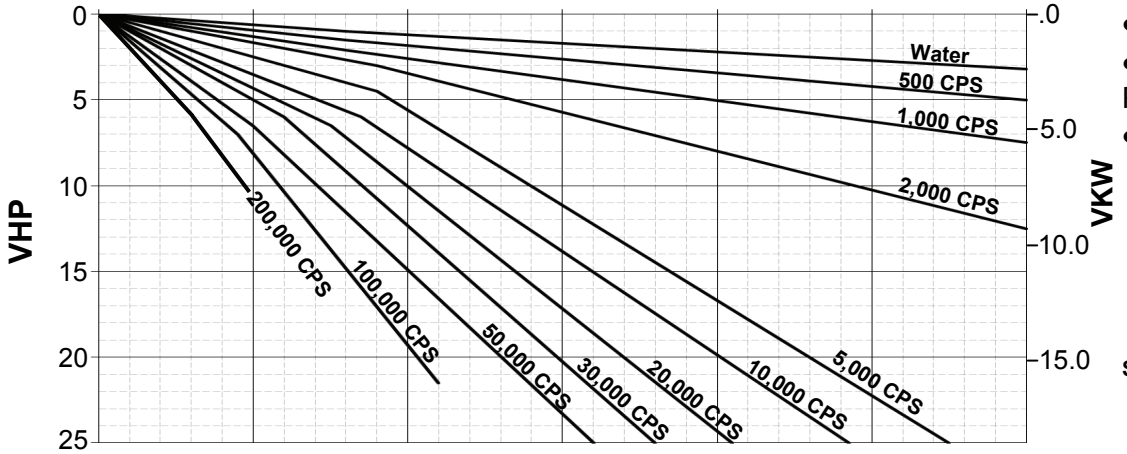

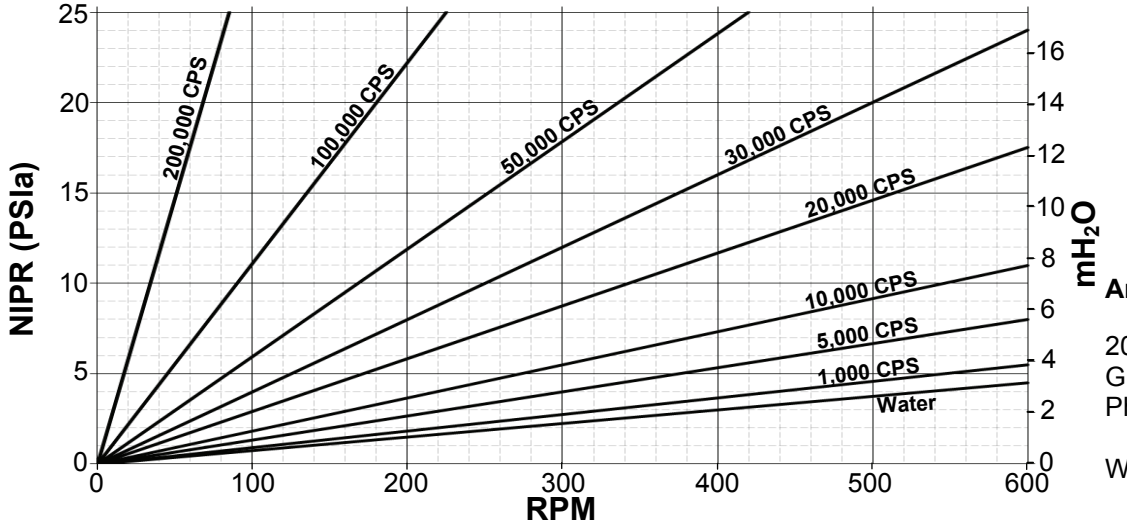

Ampco ZP3 Series Model: ***ZP3-180*** ***ZP3-184***

Standard Clearances
Standard Port Size = 3.0”
Displacement =
0.380 Gal/Rev
(1.438 L/Rev)

BHP = WHP + VHP

Operating Specifications:
- 0-600 RPM Range
- 450 PSI (31.0 bar) Max. Pressure
- Temperature Range
  -40 °F (-40°C) to
  300 °F (149°C)

Subject to change without notice

Ampco Pumps Company
2045 West Mill Road
Glendale, WI 53209 USA
Phone: (800) 737-8671
(414) 643-1852
Website:
www.ampcopumps.com

ZP3 Series Positive Displacement Pumps

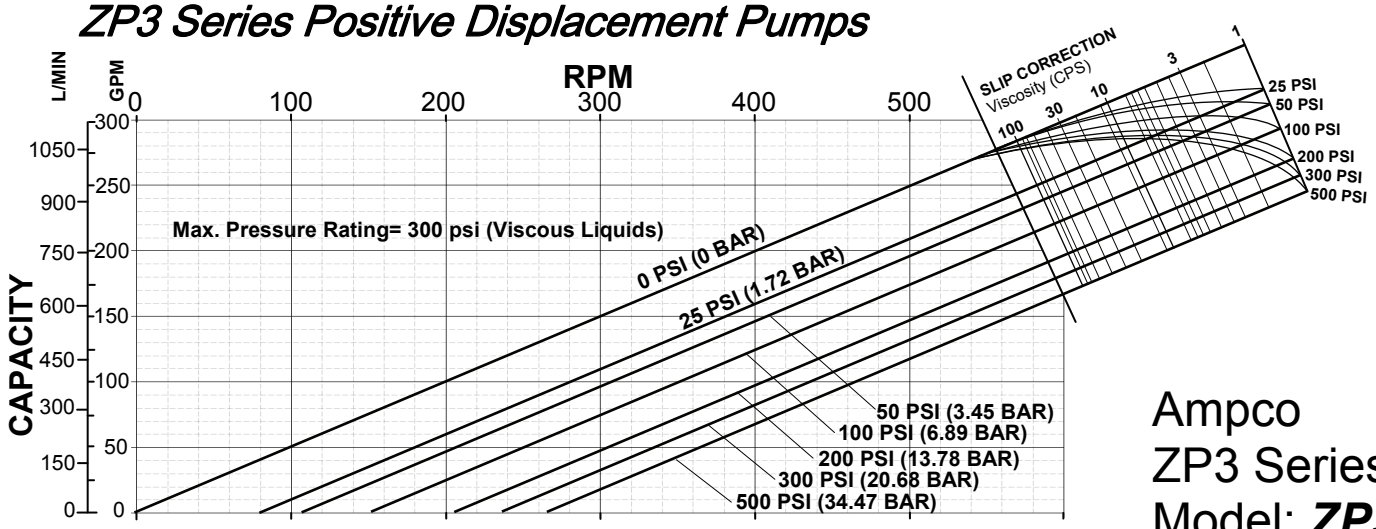

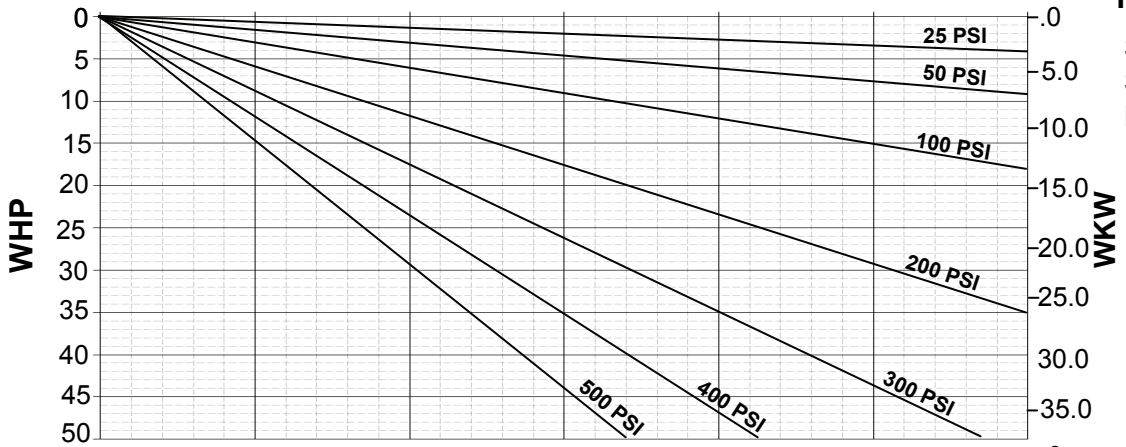

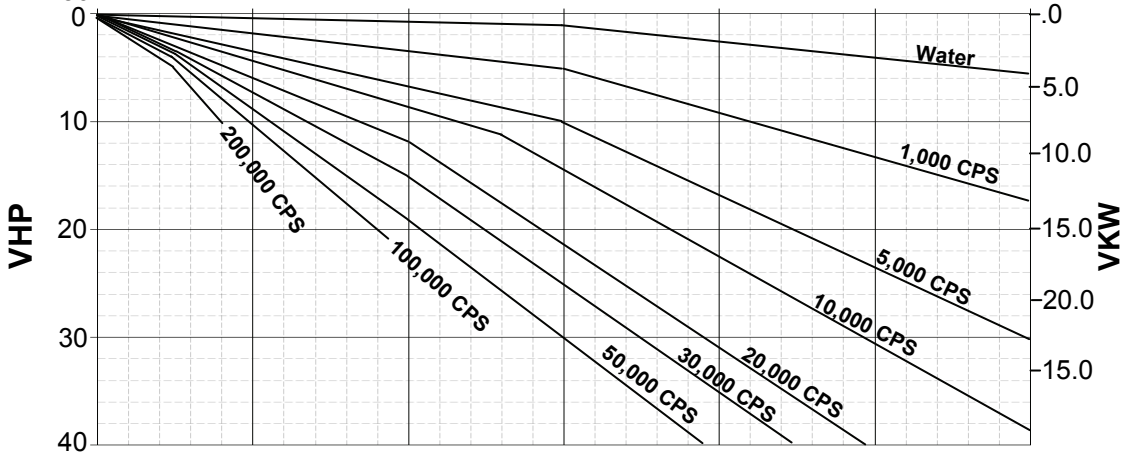

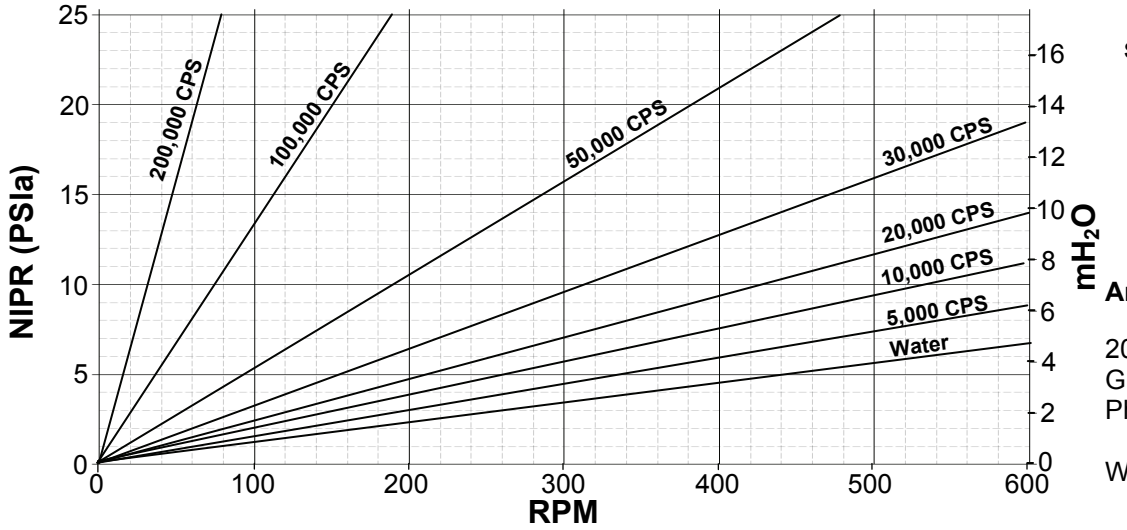

Ampco ZP3 Series Model: ***ZP3-214***

Standard Clearances
Standard Port Size = 4.0”
Displacement =
0.502 Gal/Rev
(1.900 L/Rev)

BHP = WHP + VHP

Operating Specifications:
- 0-600 RPM Range
- 500 PSI (34.48 bar) Max. Pressure
- Temperature Range
  -40 °F (-40°C) to
  300 °F (149°C)

Subject to change without notice

Ampco Pumps Company
2045 West Mill Road
Glendale, WI 53209 USA
Phone: (800) 737-8671
(414) 643-1852
Website:
www.ampcopumps.com

ZP3 Series Positive Displacement Pumps

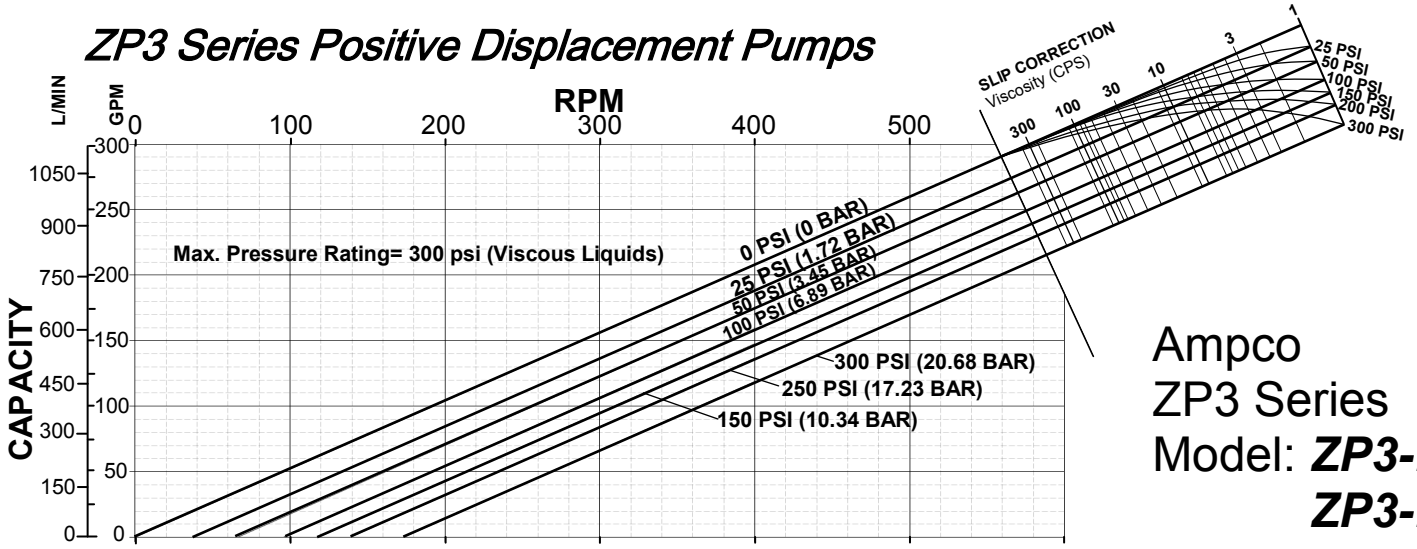

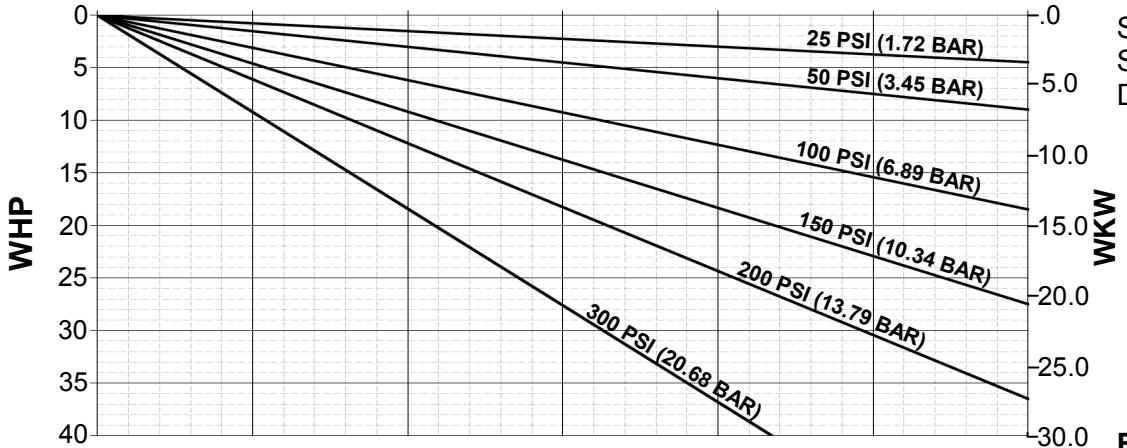

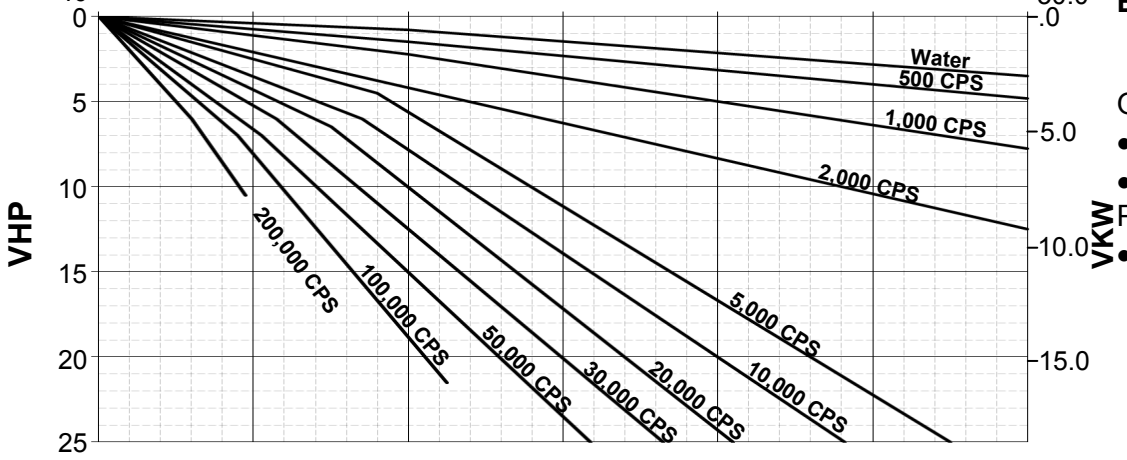

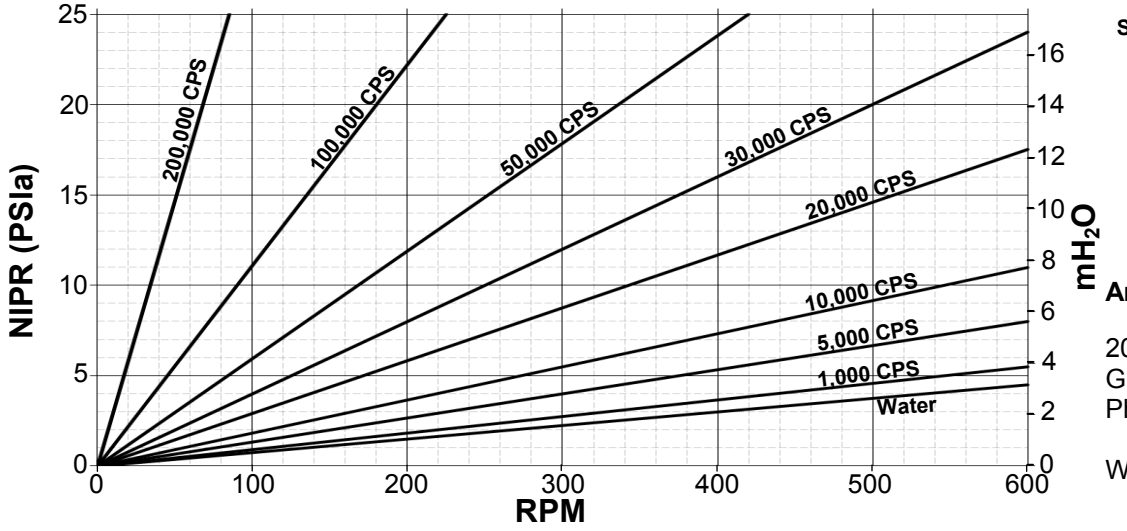

Ampco
ZP3 Series
Model: ***ZP3-220***
ZP3-224

Standard Clearances
Standard Port Size = 4.0”
Displacement =
0.521 Gal/Rev
(1.972 L/Rev)

BHP = WHP + VHP

Operating Specifications:
- 0-600 RPM Range
- 300 PSI (20.68 bar) Max. Pressure
- Temperature Range
  -40 °F (-40°C) to
  300 °F (149°C)

Subject to change without notice

Ampco Pumps Company
2045 West Mill Road
Glendale, WI 53209 USA
Phone: (800) 737-8671
(414) 643-1852
Website:
www.ampcopumps.com

ZP3 Series Positive Displacement Pumps

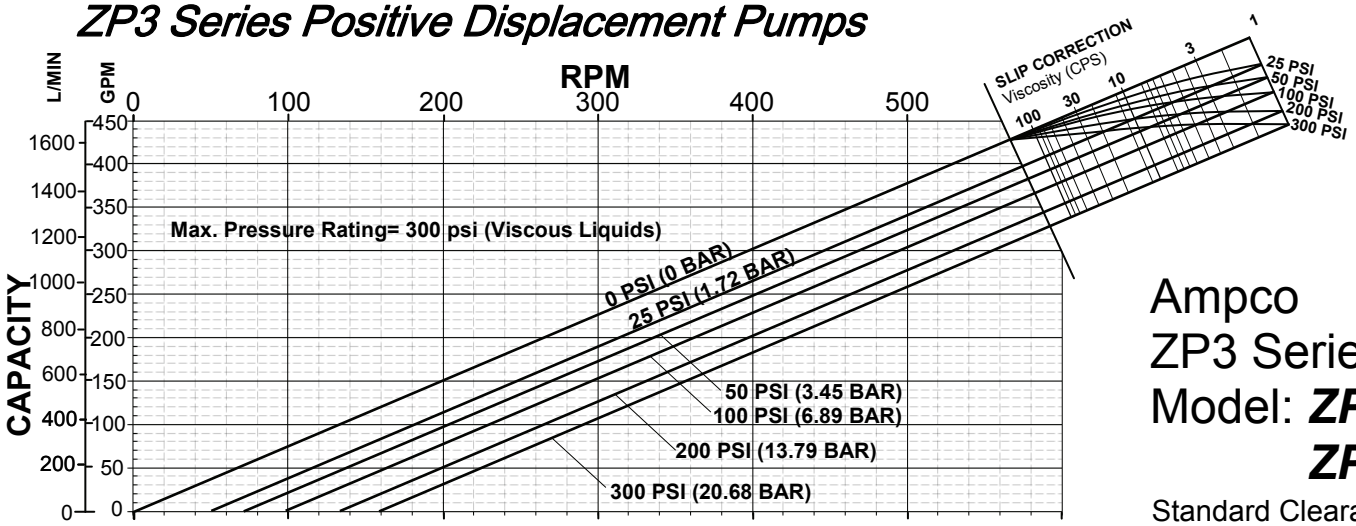

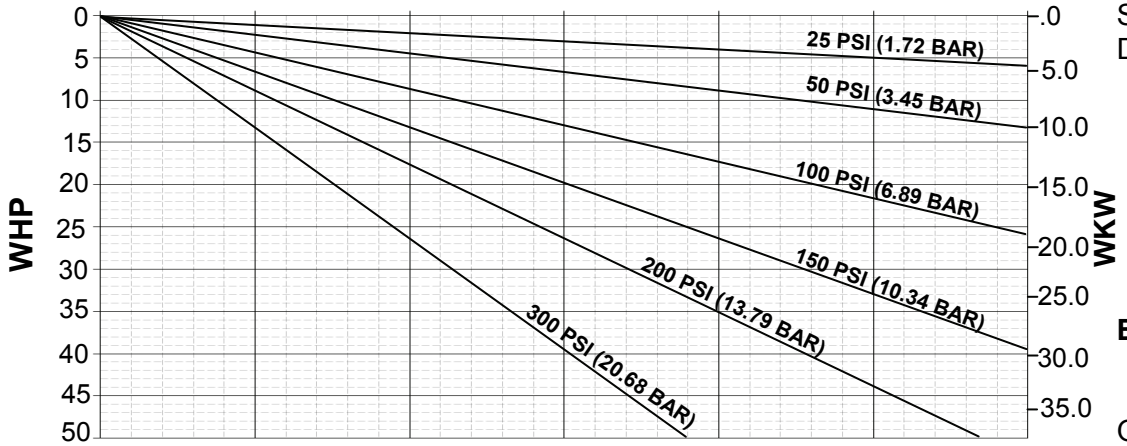

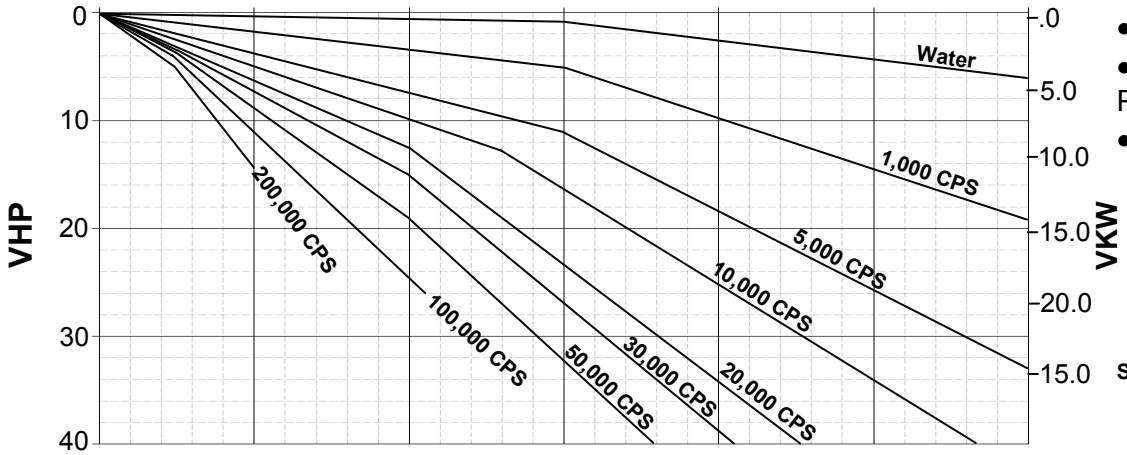

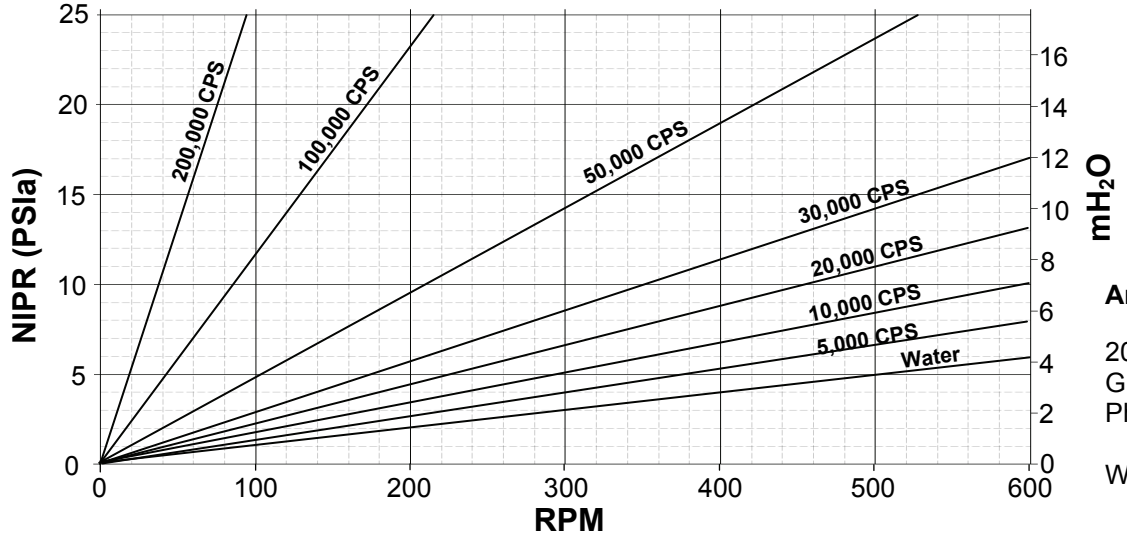

Ampco ZP3 Series Model: ***ZP3-320*** ***ZP3-324***

Standard Clearances
Standard Port Size = 6.0”
Displacement =

0.752 Gal/Rev
(2.725 L/Rev)

BHP = WHP + VHP

Operating Specifications:

- 0-600 RPM Range
- 300 PSI (20.68 bar) Max. Pressure
- Temperature Range
  -40 °F (-40°C) to
  300 °F (149°C)

Subject to change without notice

Ampco Pumps Company

2045 West Mill Road
Glendale, WI 53209 USA
Phone: (800) 737-8671
(414) 643-1852
Website:
www.ampcopumps.com